



fly style

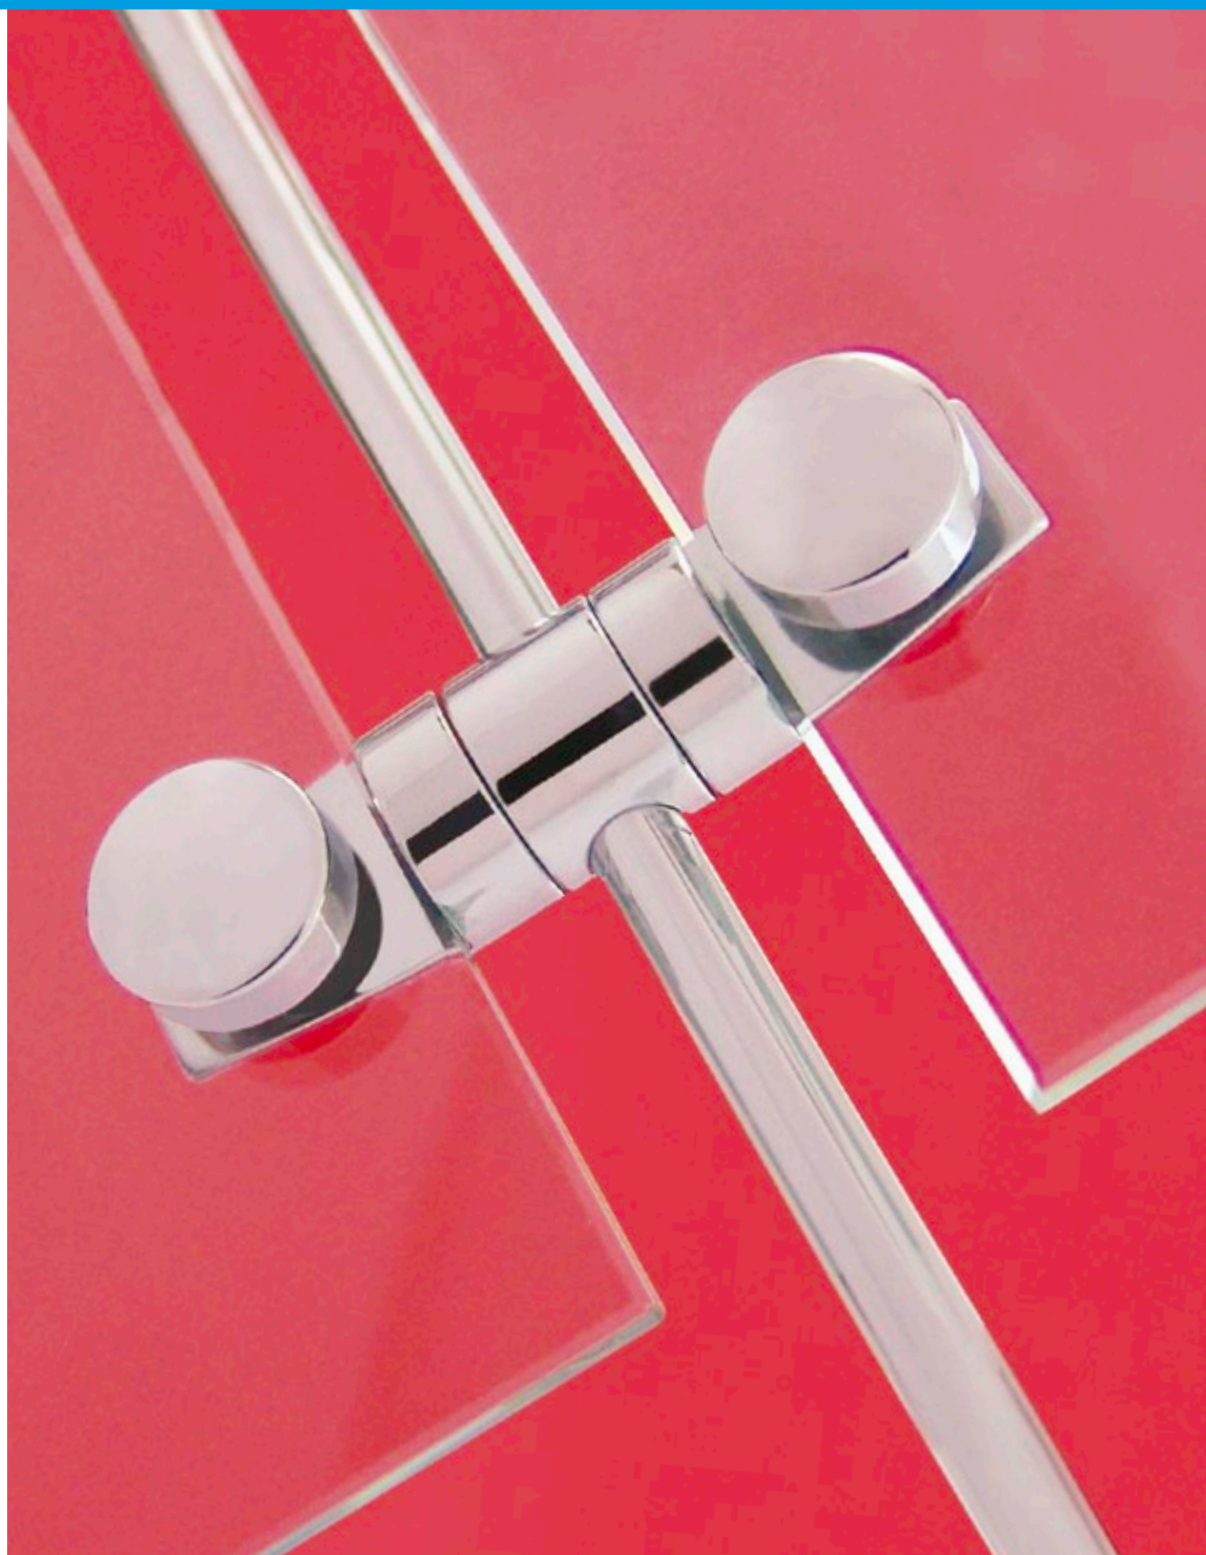

FLY

forte




EN ceiling support for bar. mount the ceiling support, insert the bar into the hull, mount the screw on the bar end, screw bar with hull on the ceiling support. bar thickness: Ø6mm.



n° articolo | artikelnr. | product nr.

cromo | chrom | chrome 1 box pz/st/pc
YCS1529CM 10pcs

spina

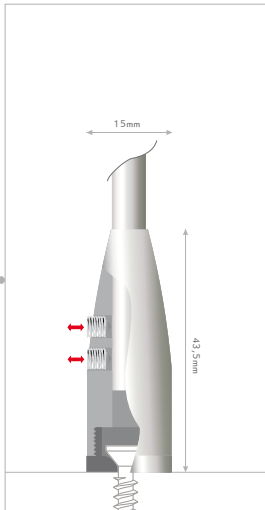


EN adjustable bar pedestal. insert the bar and fix with lateral screw. length is adjustable by screwing, balances little bump of floor, clamps the bar safely. bar thickness: Ø6mm.



n° articolo | artikelnr. | product nr.

cromo | chrom | chrome 1 box pz/st/pc
YSN1543CM 10pcs

arte

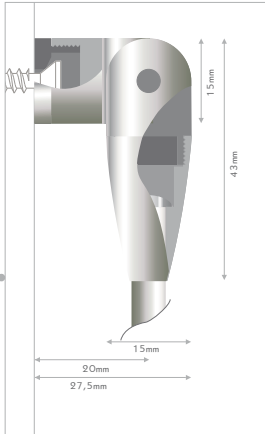


EN 180° pivoting support for bar. mount the wall resp. ceiling support, insert the bar into the hull, mount the screw on the bar end, screw the bar with the hull on the support. bar thickness: Ø6mm.



n° articolo | artikelnr. | product nr.

cromo chrom chrome	1box	pz/st/pc
YAR2743CM	10pcs	

asta

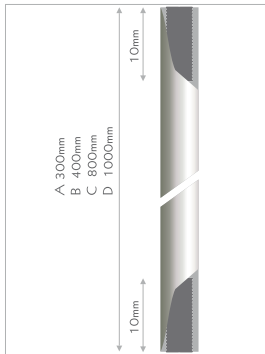

EN modular bars. solid bars in four different length, with M4 thread and allen screw for connecting. mounting: screw system. material: chrome-plated brass. length: 300mm, 400mm, 800mm, 1000mm. bar thickness: Ø6mm.


combinations



n° articolo | artikelnr. | product nr.

cromo chrom chrome		1box
YWS3006CM	300mm 2pcs	
YWS4006CM	400mm 2pcs	
YWS8006CM	800mm 2pcs	
YWS10006CM	1000mm 2pcs	

cima




EN end cap. cap to screw on bars. mounting: screw system. material: chrome-plated brass. bar thickness: Ø6mm.



n° articolo | artikelnr. | product nr.

cromo chrom chrome	1box	pz/st/pc
YWS1008CM	40pcs	

FLY**fermo**


EN wall support for bars. for wall or ceiling mounting of bars resp. for reinforcing the bars on the wall. mount the hull, put on the support, support and bar are each fixed with allen screw. bar thickness: Ø6mm.



n° articolo | artikelnr. | product nr.

cromo | chrom | chrome 1 box pz/st/pc
YWS1530CM 40pcs

combinations

**maestro**


EN frontal panelsupport for bars. fixing of support and panel with allen screw. head with lateral hole for easy closing. panel hole: Ø4mm. bar: Ø6mm.



n° articolo | artikelnr. | product nr.

cromo | chrom | chrome 1 box pz/st/pc
YWS1525CM 40pcs

combinations

**profi**

EN frontal double-panelsupport for bars. fixing of support and panel with allen screw. deco heads with lateral hole for easy closing. panel hole: Ø4mm. bar: Ø6mm.





n° articolo | artikelnr. | product nr.

cromo | chrom | chrome 1 box pz/st/pc
YCS1527CM 40pcs

combinations



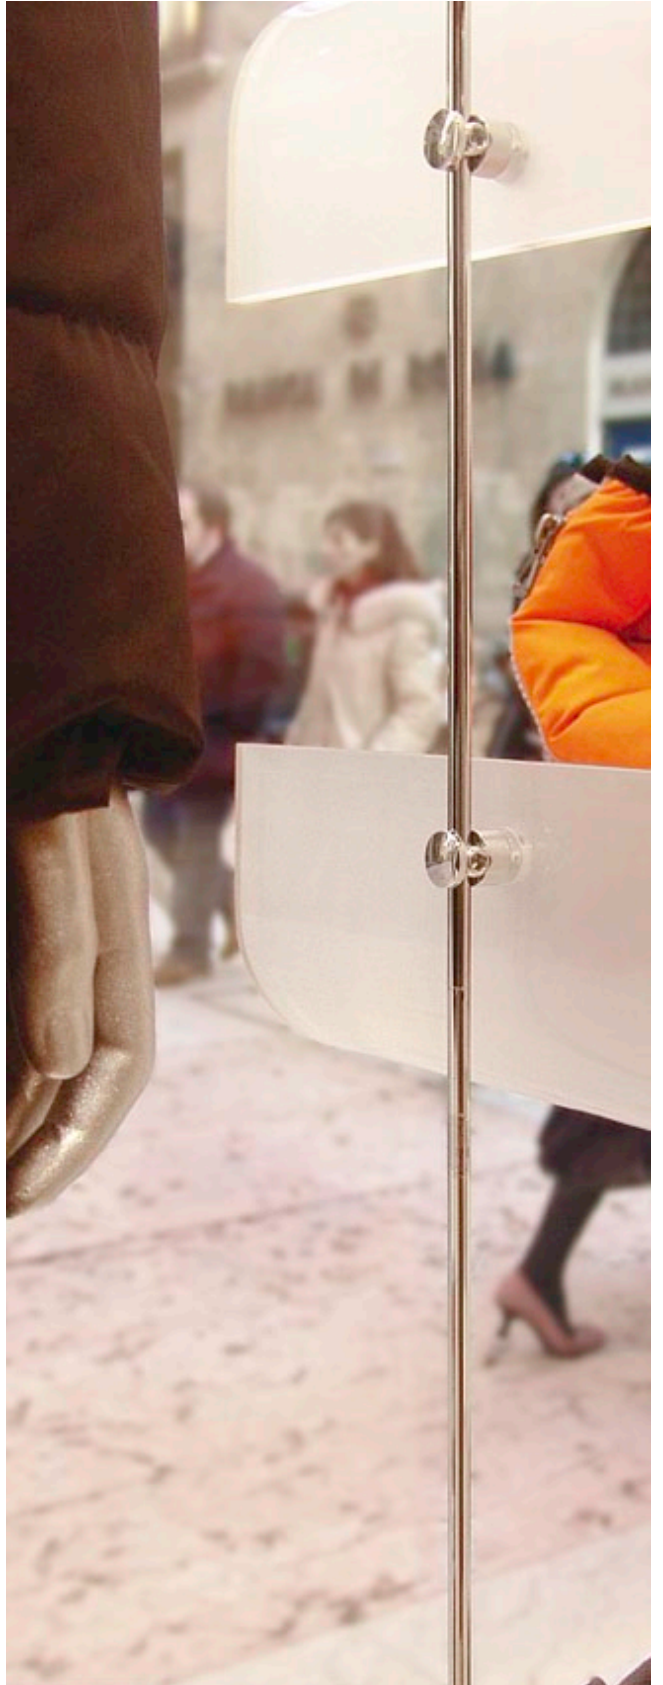

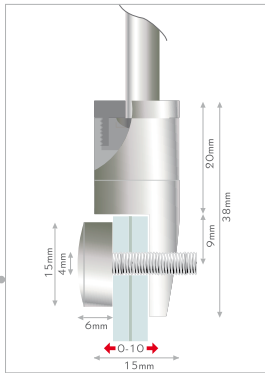
FLY**amo**

EN panelsupport for bars. for frontal mounting of suspended panels on bars. fixing of support at the bar and the panel with allen screw. deco head with lateral hole for easy closing. panel hole: Ø4mm. bar thickness: Ø6mm.



n° articolo | artikelnr. | product nr.

cromo | chrom | chrome 1 box pz/st/pc
YCS1535CM 10pcs


mira

EN lateral panelsupport for bars. mounting of support and panel with allen screws. support head is freely adjustable for vertical, horizontal or aslope mounting of panel. bar thickness: Ø6mm.



n° articolo | artikelnr. | product nr.

cromo | chrom | chrome 1 box pz/st/pc
YMI1536CM 40pcs

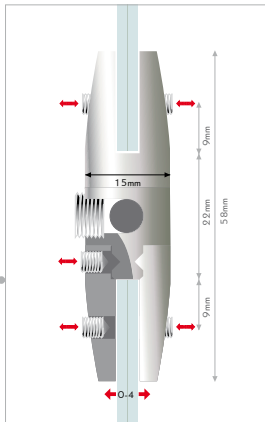doppio


EN lateral double-panelsupport for bars. mounting of support and panels with allen screws. support heads are independently freely adjustable for vertical, horizontal or aslope mounting of panels. bar: Ø6mm.



n° articolo | artikelnr. | product nr.

cromo | chrom | chrome 1 box pz/st/pc
YDP1538CM 20pcs

lato



EN lateral panelsupport for bars. mounting of support and panel with allen screws. support head is freely adjustable for vertical, horizontal or aslope mounting of panels. mounting: lateral panel support for bars, freely adjustable. material: chrome-plated brass. panel thickness: 0-10mm, more with longer allen screw. bar thickness: Ø6mm.




n° articolo | artikelnr. | product nr.


chromo | chrom | chrome 1box pz/st/pc
YWS1545CM 40pc



cupido

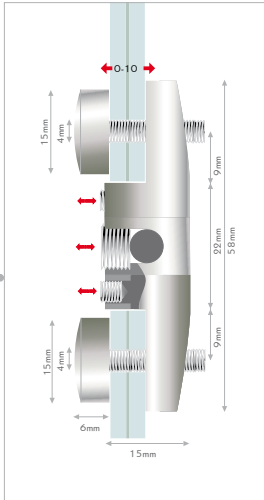

EN lateral double-panelsupport for bars. mounting of support and panels with allen screws. support head is freely adjustable for vertical, horizontal or aslope mounting of panels. mounting: lateral panel support for bars, freely adjustable. material: chrome-plated brass. panel thickness: 0-10mm, more with longer allen screw. bar: Ø6mm.



n° articolo | artikelnr. | product nr.

chromo | chrom | chrome 1box pz/st/pc
YWS1568CM 10pcs





arte




tripla




croce

FLY

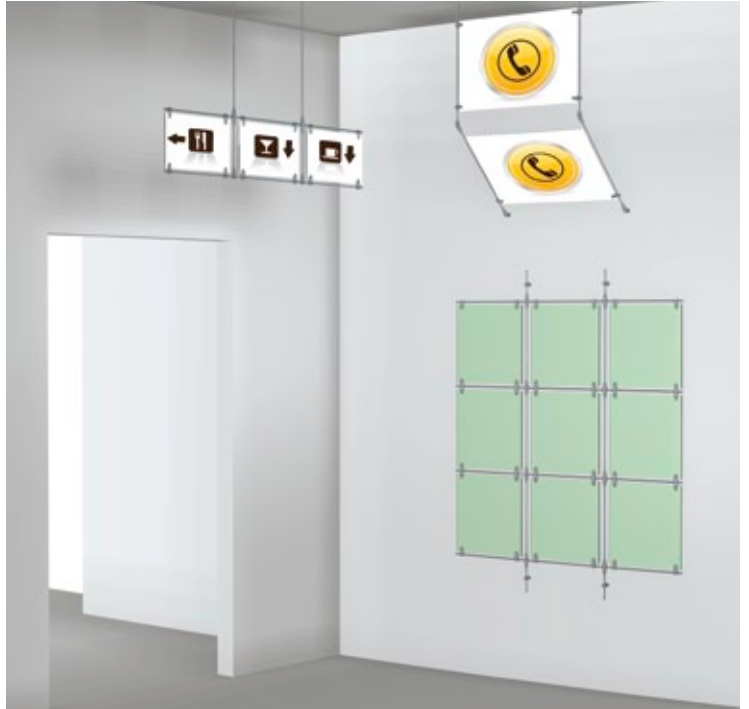

arte

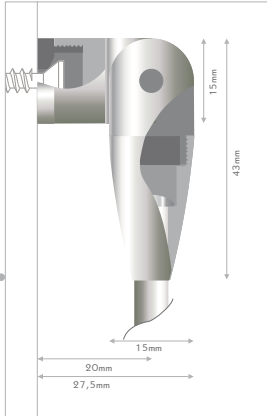

IT connettore snodabile di astine. utilizzabile per il fissaggio a parete e come connettore per 2 astine. il giunto, ruotabile di 180°, permette di montare le astine non solo ad angolo retto ma anche in altre direzioni. agganciare le due parti di arte alle astine, mettere la brugola all'estremità delle astine e avvitare per collegarle. spessore dell'astina: Ø6mm.

DE schwenkbarer Stangenverbinder. für wandmontage oder als verbinder für zwei Stangen einsetzbar. 180° schwenkbares Gelenk für alle Neigungen im Halbkreis. die beiden teile von arte auf je eine Stange schieben, schraube auf den Stangenenden befestigen, beide teile miteinander verschrauben. Stabstärke: Ø6mm.

EN pivoting bar connector. a support to wallmount the bars and to connect two of them. 180° pivoting joint for all positions of the semicircle. take the two parts of the support and insert in each one bar. then screw on the bar ends and screw the two parts of the support together to connect the bars. bar thickness: Ø6mm.




combinations



n° articolo | artikelnr. | product nr.

cromo | chrom | chrome 1 box pz/st/pc
YAR2743CM 10pcs


tripla

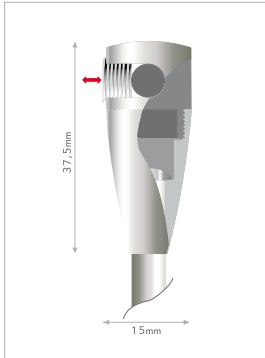

IT connettore a T per 2 astine. inserire un'astina nel foro alla base del cono e l'altra perpendicolarmente all'estremità a punta di tripla. effettuare il fissaggio con la brugola. per connessione semplici di due astine. spessore dell'astina: Ø6mm

DE T-verbinder für 2 stangen. stange durch den halter schieben, zweite stange im rechten winkel befestigen. für einfache querverbindungen. befestigung mit madenschrauben. stabstärke: Ø6mm.

EN T-connector for 2 bars. push the bar through the connector, and insert the second bar in right angle. for simple crosslinks. connection is fastened with allen screws. bar thickness: Ø6mm.




combinations



n° articolo | artikelnr. | product nr.

cromo | chrom | chrome 1 box pz/st/pc
YTR1537CM * 20pcs

croce

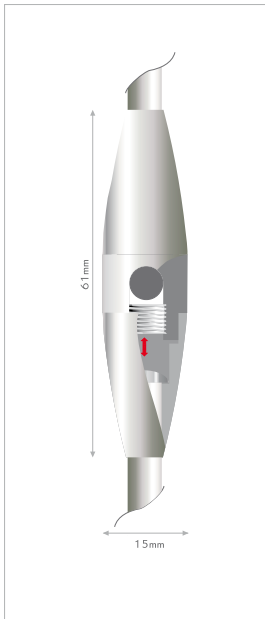

IT connettore ad incrocio per astine. per la connessione a croce di tre astine. inserire due astine nelle estremità e la terza perpendicolarmente, nel foro centrale. effettuare il fissaggio con la brugola, che rimane nascosta alla vista. spessore dell'astina: Ø6mm

DE überkreuzverbinder für stangen. drei stangen für querkreuze verbinden. je eine stange in die enden bzw. den zentralen durchlass einschieben und mit unsichtbar montierter schraube bzw. gewindestift sichern. stabstärke: Ø6mm.

EN cross-over bar connector. connects three bars cross-over. insert the bars into the connector, fasten with blind mounted allen screw internally. bar thickness: Ø6mm.



combinations



n° articolo | artikelnr. | product nr.

cromo | chrom | chrome 1 box pz/st/pc
YCC1561CM * 10pcs

* fino ad esaurimento scorte | solange vorrat reicht | while stock last